















2011 MGT Al-Mozanab Gen Trading




In 2011, it all began. 5 STAR was developed by understanding and meeting the demands of global craftsmen and it is the superior quality adhesive tapes.



Line up & Technical Data

	#520	#515	#513	#620W
				
Thickness	0.20mm	0.15mm	0.13mm	0.194mm
Width x Length	19mm x 10yds	19mm x 10yds	19mm x 10yds 18mm x 10M	19mm x 22yds
Color	 	 	 	 
Adhesion Test Panel	1.68 N/10mm	1.55 N/10mm	1.24 N/10mm	2.90 N/10mm
Adhesion Backing	2.19 N/10mm	2.05 N/10mm	1.89 N/10mm	2.50 N/10mm
Tensile Strength	36.4 N/10mm	27.3 N/10mm	23.3 N/10mm	29.5 N/10mm
Elongation	191%	188%	180%	230%
Volume Resistivity	6.99 x 10 ⁸ MΩ.cm	2.90 x 10 ⁸ MΩ.cm	2.05 x 10 ⁸ MΩ.cm	4.8 x 10 ¹³ MΩ.cm
Withstand Voltage (5000V x 1minute)	Good	Good	Good	Good

Over 60 Countries

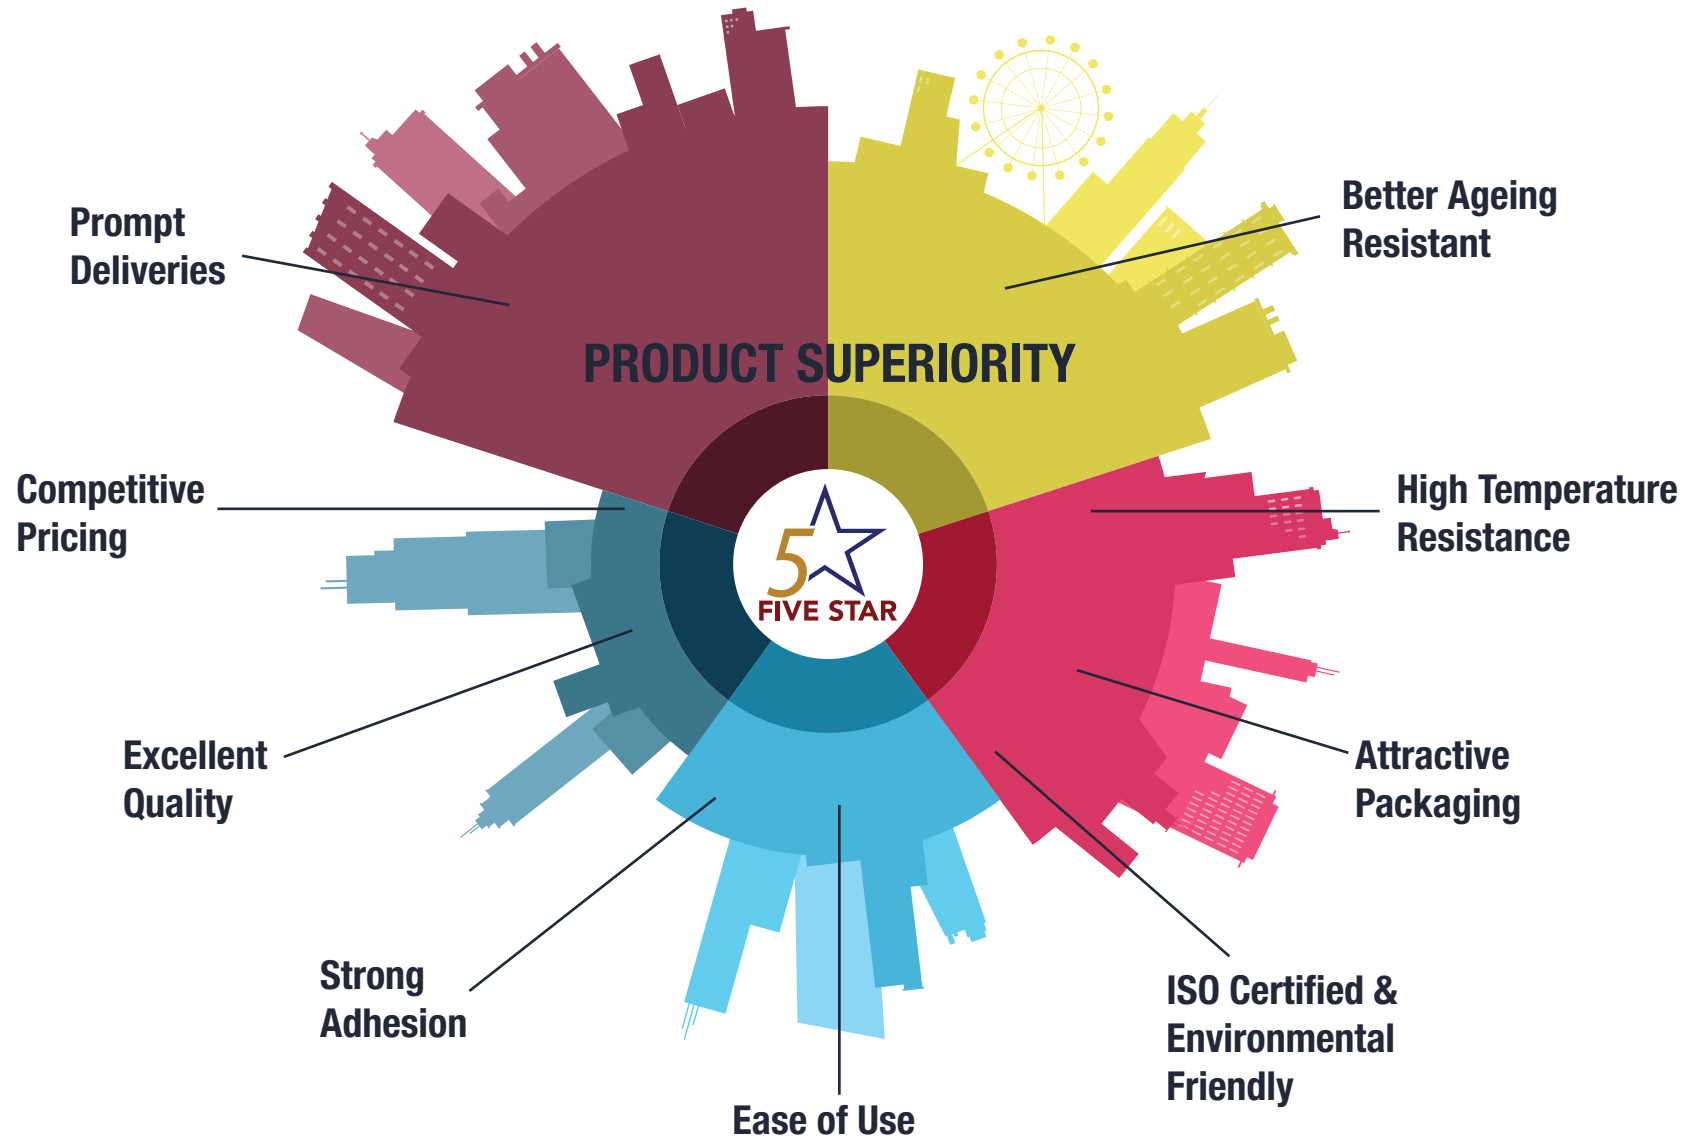

Environmental Friendly

Reduced harmful substances enable you to use anywhere, anytime.

CONFORM WITH EU REGULATIONS



Certified by Renowned International Body so you can buy worry-free.

ISO CERTIFIED MANUFACTURER



Total Thickness	0.115mm±10%
Tensile Strength	≥2.7kg/19mm
Elongation	>150%
Adhesion to Steel	≥0.23kg/19mm
Adhesion to Backing	≥0.27kg/19mm
Breakdown Voltage	>4.5kv



PVC Electrical Tapes

General Purpose Electrical Tape

Features:

PVC electrical tape is made of glossy soft PVC film coated with rubber-based adhesive, soft and moderate, medium elasticity, high tensile resistance, high viscosity, and has excellent insulation properties, withstand voltage 600V etc.

Applications:

It is used for wire connection and winding, electrical insulation protection, it can withstand 600V voltage, working temperature is 0-80°C, and it can also be used for bandaging, repairing, packaging, protection and other industrial applications.

Storage:

Store at room temperature and indoor humidity. Shelf life is 1 year.



ISO CERTIFIED MANUFACTURER



Total Thickness	0.10mm±10%
Tensile Strength	≥2.6kg/19mm
Elongation	>150%
Adhesion to Steel	≥0.20kg/19mm
Adhesion to Backing	≥0.25kg/19mm
Breakdown Voltage	>4.5kv
Flames Retardant	Yes



PVC Electrical Tapes

Wire Harness Insulation Tape

Features:

Wire harness tape is made of matte soft PVC film coated rubber-based adhesive, softer, high elasticity, shiny, high tensile strength, high viscosity, excellent insulation, withstands voltage 0-600V, flame retardant etc. It's the low lead eco-friendly product with low cadmium content.

Applications:

It is used for wire connection winding, electrical insulation protection, it can withstand 600V voltage, working temperature is 0-80°C, and it can also be used for bandaging, repairing, packaging, protection and other industrial purposes.

Storage:

Store at room temperature and indoor humidity. Shelf life is 1 year.



ISO CERTIFIED MANUFACTURER



Total Thickness	0.175mm±10%
Tensile Strength	≥7kg/19mm
Elongation	175%
Adhesion to Steel	≥0.30kg/19mm
Adhesion to Backing	≥0.35kg/19mm
Breakdown Voltage	>7.0kv



PVC Electrical Tapes

Electrical Tape with UL Certification

Features:

It is made of matte soft PVC film coated with rubber-based adhesive, soft and moderate, high elasticity, high tensile strength, high viscosity, high insulation level withstanding voltage 600V, and operating temperature is 0-80°C.

Applications:

It is used for wire connection winding, electrical insulation protection, etc. It can withstand 600V voltage, working temperature is 0-80°C, and it can also be used for bandaging, repairing, packaging, protection and other industrial purposes.

Storage:

Store at room temperature and indoor humidity. Shelf life is 1 year.



LISTED



ISO CERTIFIED MANUFACTURER



Total Thickness	0.19mm±10%
Tensile Strength	5.3kg/19mm
Elongation	175%
Adhesion to Steel	≥0.23kg/19mm
Adhesion to Backing	≥0.27kg/19mm
Breakdown Voltage	>7.0kv/mm
Flames Retardant	Yes
Environmental Requirements	Comply with RoHS 2.0 standard



PVC Electrical Tapes

General Purpose Electrical Tape

Features:

It is made of matte soft eco-friendly PVC film, coated with rubber adhesive tape. It has excellent insulation, voltage resistance, flame-retardant etc. It's eco-friendly product with low lead and cadmium content.

Applications:

Suitable for wire connection winding, electrical insulation protection, etc.

Storage:

Store at room temperature and indoor humidity. Shelf life is 1 year.



ANTI-FIRE



FIVE STAR

ISO CERTIFIED MANUFACTURER



MGT

Al-Mozanab Gen Trading



We're proud
We keep supplying the highest
quality products all over the world.

Notes

- All pictures and illustrations used are provided for illustrative purposes only and actual product may vary.
- All pictures and illustrations are indicated only for reference, and are not guaranteed.
- Products and packaging are subject to change without prior notice.
- Verification of technical information are conducted by our quality control team under specified conditions and data contained in this catalog should be considered representative values and are not guaranteed.



Distributed by:

Al-Mozanab General Trading Co. LLC
1107 Shobha Ivory Tower 2,
Business Bay, Dubai.

www.sbrpoweradvantage.com